

Serie | 2, telescopic cooker hood, 90 cm, Silver metallic DFT93CA50M



The telescopic cooker hood: practically disappears into your upper cabinet, giving you a sleek kitchen front.

- With exhaust, the air is cleaned by a grease filter and then ducted to the outside which ensures optimal kitchen air quality.
- 3-Speed Power Level Options To Suit Your Cooking Style And Recipes
- Slide Switch Control

Technical Data

Typology :	Pull-out
Approval certificates :	CE, G-Mark, VDE
Length electrical supply cord (cm) :	110
Required niche size for installation (HxWxD) :	135mm x 898.0mm x 264mm
Net weight (kg) :	9.366
Type of control :	mechanical
Number of speed settings :	3
Maximum output air extraction (m ³ /h) :	305
Maximum output recirculating air (m ³ /h) :	240
Number of lights :	2
Noise level (dB) :	67
Diameter of air outlet (mm) :	150
Grease filter material :	Washable aluminium
Odour filter :	No
Operating Mode :	Air extraction only
Optional accessories :	DWZ9IX1G9
Total power of the lamps (W) :	8
Grease filter type :	Kassette
Connection Rating (W) :	153
Voltage (V) :	220-240
Frequency (Hz) :	50
Plug type :	GB plug
Installation typology :	Built-in
Material body :	Lacquered
Approval certificates :	CE, G-Mark, VDE
Plug type :	GB plug
Dimensions of the product, with chimney (if exists) (in) :	/ x x
Dimensions of the packed product (in) :	14.56 x 10.03 x 37.67
Net weight (lbs) :	21.000
Gross weight (lbs) :	23.000
Motor location :	Integrated motor in hood body
No-return airflow flap :	No
Length electrical supply cord (cm) :	110
Dimensions of the product, with chimney (if exists) (mm) :	175 x 898.0 x 300.0
Dimensions of the packed product (HxWxD) (mm) :	370 x 255 x 957
Net weight (kg) :	9.366
Gross weight (kg) :	10.5



**Serie | 2, telescopic cooker hood, 90 cm,
Silver metallic
DFT93CA50M**

**The telescopic cooker hood: practically
disappears into your upper cabinet, giving
you a sleek kitchen front.**

Variant:

Design:

- Pull-out vapour with glass

Comfort:

- Suitable for ducted or re-circulated extraction
- 3 speeds control
- Single motor
- 2 X 4 W LED Illumination
- Metal grease filter, dishwasher safe

Environment and Safety:

- Energy Efficiency Class: D*
- Average Energy Consumption: 88.6 kWh/year*
- Lighting Efficiency Class: D*
- Grease Filtering Efficiency Class: C*
- Handle strip white

Technical information:

- Ducted extraction rate according to DIN/EN 61591max. 305 m³/h
- Noise level according to EN 60704-3 und EN 60704-2-13 at max. normal use exhaust air: 67 dB(A) re 1 pW (53 dB(A) re 20 µPa sound pressure)
- Noise min./max. Normal Level: 53/67 dB*
- Power rating: 153 W
- Light Intensity: 100 lux
- Colour Temperature: 3000 K


Measures:

- Dimensions exhaust air (HxWxD): 175-175 x 898 x 300 mm
- Dimensions recirculating (HxWxD): 175-175 x 898 x 300 mm
- Diameter pipe Ø 150 mm (Ø 150 mm enclosed)

* In accordance with the EU-Regulation No 65/2014

**Serie | 2, telescopic cooker hood, 90 cm,
Silver metallic
DFT93CA50M**

measurements in mm

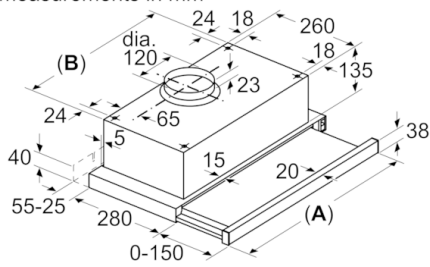

Hood Type	A	B	Hood Type	A	B
450	448	348	700	698	598
500	498	398	800	798	698
550	548	448	900	898	798
600	598	498			