


**Series 4, wall-mounted cooker hood,  
90 cm, clear glass black printed,  
Black  
DWK96PJ60M**

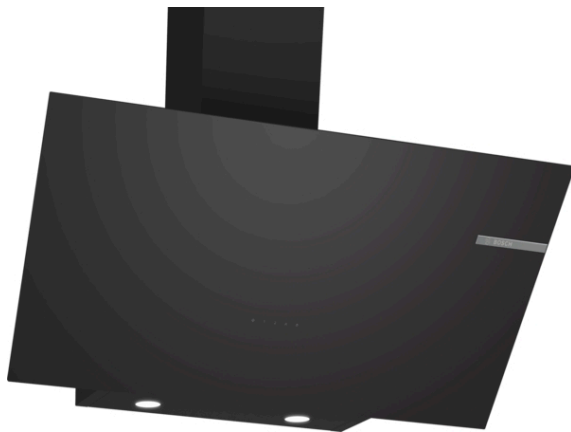

**Optional accessories**

DWZ1GK6K2 : Chimney extension 350 mm  
DWZ6HK1E2 : Carbon fleece filter  
DWZ6HK1H3 : Carbon fleece filter  
DWZ6HK1H4 : Active carbon filter

**The wall-mounted chimney hood: mount it  
on the wall, giving you complete freedom  
in your kitchen planning.**

- **Metal Grease Filter:** cleans the air, captures grease, easy monthly clean-up.
- Converts to Recirculation Mode with Accessory Kit (Separate Purchase Required)
- Absorbs odors with Charcoal Replacement Filters (Available for sale)
- Ducted or Non-ducted Options
- **Grease filter saturation:** automatic reminders to clean your metal grease filters.

**Technical Data**

Color chimney : Black  
Typology : Wall-mounted  
Length electrical supply cord : 180.0 cm  
Height of product, without chimney : 400 mm  
Net weight : 11.3 kg  
Type of control : Electronic  
Number of speed settings : 2-stage\_Intensive  
Maximum output air extraction : 700 m<sup>3</sup>/h  
Boost position output recirculating : 307.0 m<sup>3</sup>/h  
Maximum output recirculating air : 296 m<sup>3</sup>/h  
Boost position air extraction : 700 m<sup>3</sup>/h  
Number of lights : 2  
Noise level : 59 dB(A) re 1pW  
Diameter of air outlet : 120 / 150 mm  
Grease filter material : Washable aluminium  
Odour filter : No  
Operating Mode : Convertible  
Optional accessories : DWZ1GK6K2, DWZ6HK1E2, DWZ6HK1H3, DWZ6HK1H4  
Type of lamps used : LED  
Grease filter type : Kasette  
Clean filter reminders : Yes  
Connection Rating : 216 W  
Voltage : 220-240 V  
Frequency : 50-60 Hz  
Plug type : GB plug  
Installation typology : Wall-mounted  
Body material : Glass  
Plug type : GB plug  
Dimensions of the product, with chimney (if exists) (in) : x x  
Dimensions of the packed product : 17.91 x 27.36 x 17.91  
Net weight : 25.000 lbs  
Gross weight : 31.000 lbs  
Motor location : Integrated motor in hood body  
No-return airflow flap : Yes  
Length electrical supply cord : 180.0 cm  
Dimensions of the product, with chimney (if exists) : x 896.0 x 414.0 mm  
Dimensions of the packed product (HxWxD) : 455 x 695 x 455 mm  
Net weight : 11.3 kg  
Gross weight : 13.9 kg



**Series 4, wall-mounted cooker hood, 90 cm,  
clear glass black printed, Black  
DWK96PJ60M**

**The wall-mounted chimney hood: mount it  
on the wall, giving you complete freedom in  
your kitchen planning.**

**Variant:**

- DWK96PJ60M
- Inclined design
- Wall mounted hood
- matt black with glass canopy
- 90 cm wide
- Suitable for ducted or re-circulated extraction
- For recirculated extraction standard recirculation kit (accessory) needed

**Core Features:**

- Capacitor motor
- Silence blower technology
- Power rating: 216 W
- Voltage: 220 - 240 V
- Power frequency: 50-60 Hz
- 2 x 3W led light
- Colour Temperature: 3000 K
- Light Intensity: 260 lux
- Powerboost position
- 1 metal grease filter(s)

**Performance Exhaust:**

- Max. exhaust air flow rate according to EN 61591: 700 m<sup>3</sup>/h
- Noise min./max. Normal Level: 46/59 dB
- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode:  
Speed 1: extraction rate 290 m<sup>3</sup>/h; noise level 46 dB (A) re1pW  
Speed 2: extraction rate 510 m<sup>3</sup>/h; noise level 59 dB (A) re1pW  
Intensive Speed 1: extraction rate 700 m<sup>3</sup>/h; noise level 65 dB (A) re1pW
- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 48.4 kWh/year
- Blower Efficiency Class: A
- Lighting Efficiency Class: A
- Grease Filtering Efficiency Class: D
- An alternative advanced filter technology is available as accessory which is capable of capturing up to 85% of the grease in the air.

**Comfort:**

- Touch Select Basic Control control
- 2 speeds plus intensive setting
- Automatic reset from intensive to normal setting after 9 min
- After run automatic: 15 min.
- Colour Temperature: 3000 K
- Light Intensity: 260 lux

**Cleaning Comfort:**


- Metal grease filter, dishwasher safe
- Saturation indicator for grease filter
- Easy to clean smooth surfaces and materials
- Wide opening front panel via piston for better extraction and cleaning purposes

**Planning and Installation Information:**

- Dimensions exhaust air (HxWxD): 750 mm - 750 mm x 896 mm x 414 mm
- Dimensions recirculating installation (HxWxD): 750 mm - 750 mm x 896 mm x 414 mm
- Dimensions recirculating installation, chimless (HxWxD): 471mm x 896 mm x 414 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Electrical cable length 1.8 m
- Enclosed one-way flap


**Series 4, wall-mounted cooker hood, 90 cm,  
clear glass black printed, Black  
DWK96PJ60M**

Measurements in mm

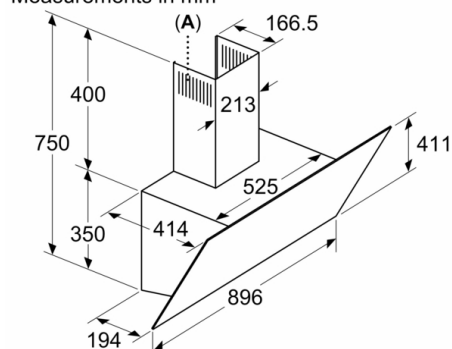


**A:** Air outlet – slots for exhaust air to be mounted facing down

Measurements in mm

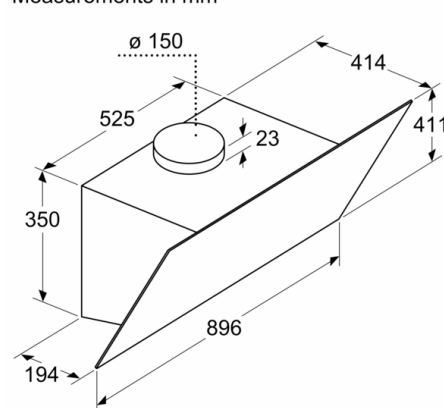


Measurements in mm

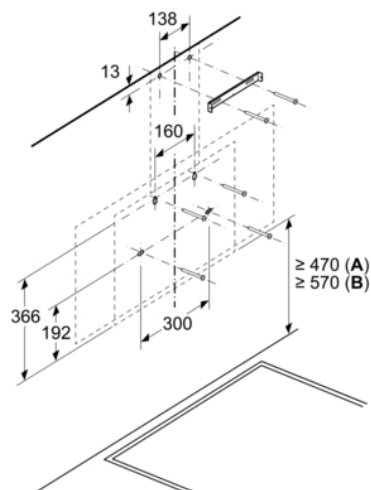

**A:** Electric

**B:** Gas - from upper edge of pan support

Measurements in mm

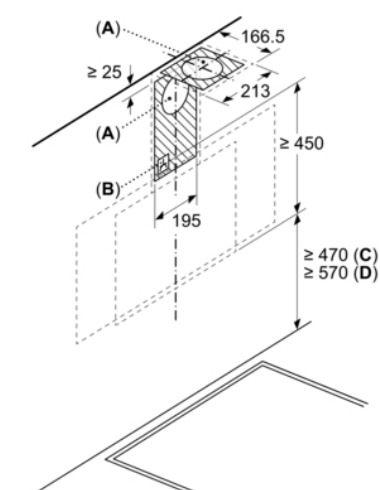

**A:** Exhaust-air outlet

**B:** Socket

**C:** Electric

**D:** Gas - from upper edge of pan support