


Series 2, Gas Hob, 60 cm, Stainless steel
PBP6C5K60M

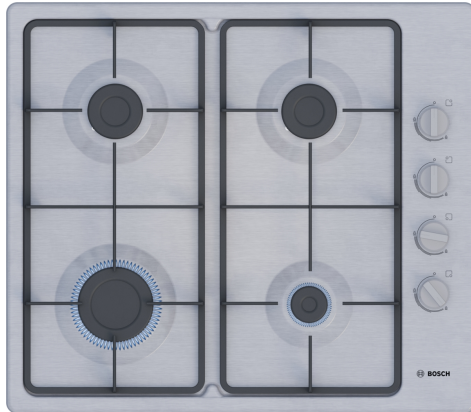

The gas hob with front mounted controls: the desired cooking zones can be conveniently operated.

- **Safety solution for your gas hob.**
- **Continuous cast-iron finish pan supports:** for maximum stability.
- **Knob ignition for a prompt and effective solution.**
- **Sword knobs:** firmer grip and easy control of your gas hob.

Product name/family:gas hob w integrated controls
 Built-in / Free-standing: Built-in
 Energy input: Gas
 Total number of positions that can be used at the same time: 4
 Type of control setting devices: sword knobs
 Required niche size for installation (HxWxD): 43 x 560-562 x 480-490 mm
 Width of the appliance: 580 mm
 Dimensions: 54x580x520 mm
 Dimensions of the packed product (HxWxD): 150 x 610 x 575 mm
 Net weight: 6.8 kg
 Gross weight: 7.7 kg
 Residual heat indicator: No
 Location of control panel: Lateral
 Basic surface material: Stainless steel
 Color of surface: Stainless steel
 Length electrical supply cord: 100.0 cm
 EAN code: 4242005463763
 Gas connection rating: 7500 W
 Fuse protection: 3 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz



Series 2, Gas Hob, 60 cm, Stainless steel PBP6C5K60M

**The gas hob with front mounted controls:
the desired cooking zones can be
conveniently operated.**

- PBP6C5K60M
- Gas hob with integrated controls, 60 cm

Design

- Stainless steel surface, brushed steel
- Cast iron finish w rubber feet

Comfort & Convenience

- Ignition via control knobs: just push and turn the knob to ignite the flame.

Burners and power

- 4 PC
- Left front: High-speed burner up to 3 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: Standard burner up to 1.75 KW (depending on gas type)
- Right front: Economy burner up to 1 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)


- Nozzle set for Natural gas nozzles (20 mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Preset of liquid gas (28-30/37mbar)
- Dimensions of the product (HxWxD mm): 54 x 580 x 520
- Required niche size for installation (HxWxD mm) : 43 x 560 x (480 - 490)
- Min. worktop thickness: 30 mm
- Connected load: 7.5 KW

Accessories

- cross support for espresso included

Series 2, Gas Hob, 60 cm, Stainless steel

PBP6C5K60M

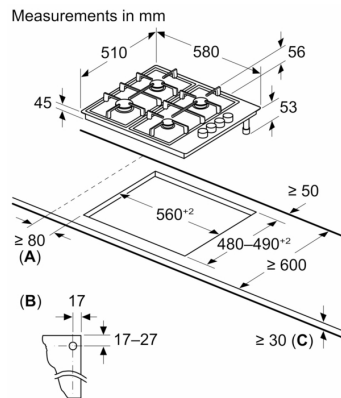

A: Min. distance from the hob cut-out to the wall

B: Position of gas connection in the cut-out

C: With fitted oven underneath possibly more; see space requirements for the oven