


**Series 6, wall-mounted cooker hood,
90 cm, clear glass black printed,
Black
DWK97PJ60M**

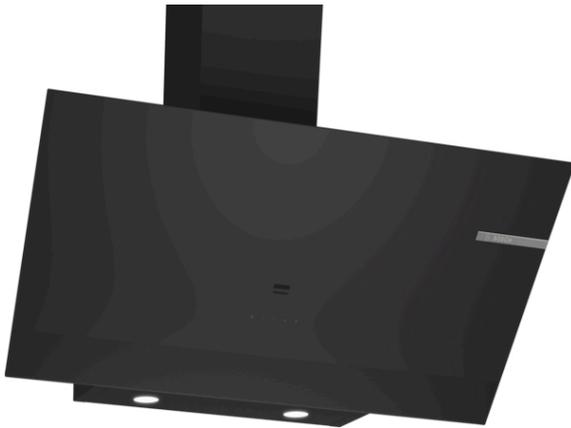

Optional accessories

DWZ1GK6K2 : Chimney extension 350 mm
 DWZ6HK1E2 : Carbon fleece filter
 DWZ6HK1H3 : Carbon fleece filter
 DWZ6HK1H4 : Active carbon filter

**The wall-mounted chimney hood: mount it
on the wall, giving you complete freedom
in your kitchen planning.**

- **Metal Grease Filter:** cleans the air, captures grease, easy monthly clean-up.
- Converts to Recirculation Mode with Accessory Kit (Separate Purchase Required)
- Absorbs odors with Charcoal Replacement Filters (Available for sale)
- Ducted or Non-ducted Options
- **Grease filter saturation:** automatic reminders to clean your metal grease filters.

Technical Data

Color chimney : Black
 Typology : Wall-mounted
 Length electrical supply cord : 180.0 cm
 Height of product, without chimney : 400 mm
 Net weight : 11.3 kg
 Type of control : Electronic
 Number of speed settings : 2-stage_Intensive
 Maximum output air extraction : 700 m³/h
 Boost position output recirculating : 307.0 m³/h
 Maximum output recirculating air : 296 m³/h
 Boost position air extraction : 700 m³/h
 Number of lights : 2
 Noise level : 59 dB(A) re 1pW
 Diameter of air outlet : 120 / 150 mm
 Grease filter material : Washable aluminium
 Odour filter : No
 Operating Mode : Convertible
 Optional accessories : DWZ1GK6K2, DWZ6HK1E2, DWZ6HK1H3, DWZ6HK1H4
 Type of lamps used : LED
 Grease filter type : Kasette
 Clean filter reminders : Yes
 Connection Rating : 234 W
 Voltage : 220-240 V
 Frequency : 50-60 Hz
 Plug type : GB plug
 Installation typology : Wall-mounted
 Body material : Glass
 Plug type : GB plug
 Dimensions of the product, with chimney (if exists) (in) : x x
 Dimensions of the packed product : 17.91 x 27.36 x 17.91
 Net weight : 25.000 lbs
 Gross weight : 31.000 lbs
 Motor location : Integrated motor in hood body
 No-return airflow flap : Yes
 Length electrical supply cord : 180.0 cm
 Dimensions of the product, with chimney (if exists) : x 896.0 x 414.0 mm
 Dimensions of the packed product (HxWxD) : 455 x 695 x 455 mm
 Net weight : 11.3 kg
 Gross weight : 13.9 kg



Series 6, wall-mounted cooker hood, 90 cm, clear glass black printed, Black DWK97PJ60M

The wall-mounted chimney hood: mount it on the wall, giving you complete freedom in your kitchen planning.

Variant:

- DWK97PJ60M
- Inclined design
- Wall mounted hood
- matt black with glass canopy
- 90 cm wide
- Suitable for ducted or re-circulated extraction
- For recirculated extraction standard recirculation kit (accessory) needed

Core Features:

- Capacitor motor
- Silence blower technology
- Power rating: 234 W
- Voltage: 220 - 240 V
- Power frequency: 50-60 Hz
- 2 x 3W led light
- Light dimmer function : the brightness of the lighting elements can be adjusted.
- Colour Temperature: 3000 K
- Light Intensity: 260 lux
- Powerboost position
- 1 metal grease filter(s)

Performance Exhaust:

- Max. exhaust air flow rate according to EN 61591: 700 m³/h
- Noise min./max. Normal Level: 46/59 dB
- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode:
Speed 1: extraction rate 290 m³/h; noise level 46 dB (A) re1pW
Speed 2: extraction rate 510 m³/h; noise level 59 dB (A) re1pW
Intensive Speed 1: extraction rate 700 m³/h; noise level 65 dB (A) re1pW
- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 49.2 kWh/year
- Blower Efficiency Class: A
- Lighting Efficiency Class: A
- Grease Filtering Efficiency Class: D
- An alternative advanced filter technology is available as accessory which is capable of capturing up to 85% of the grease in the air.

Comfort:

- Touch Select Basic Control control
- 2 speeds plus intensive setting
- Automatic reset from intensive to normal setting after 9 min
- After run automatic: 15 min.
- Colour Temperature: 3000 K
- Light Intensity: 260 lux

Cleaning Comfort:


- Gesture control with integrated infrared sensor for close range swipe gesture detection
- Metal grease filter, dishwasher safe
- Saturation indicator for grease filter
- Easy to clean smooth surfaces and materials
- Wide opening front panel via piston for better extraction and cleaning purposes

Planning and Installation Information:

- Dimensions exhaust air (HxWxD): 750 mm - 750 mm x 896 mm x 414 mm
- Dimensions recirculating installation (HxWxD): 750 mm - 750 mm x 896 mm x 414 mm
- Dimensions recirculating installation, chimless (HxWxD): 471mm x 896 mm x 414 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Electrical cable length 1.8 m
- Enclosed one-way flap


**Series 6, wall-mounted cooker hood, 90 cm,
clear glass black printed, Black
DWK97PJ60M**

Measurements in mm

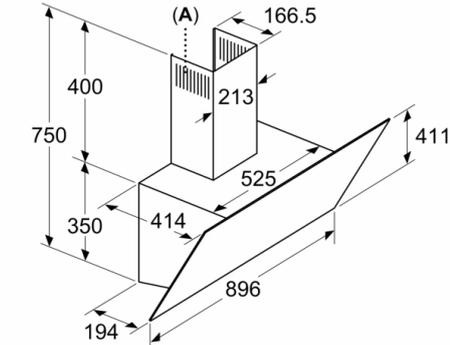


A: Air outlet – slots for exhaust air to be mounted facing down

Measurements in mm

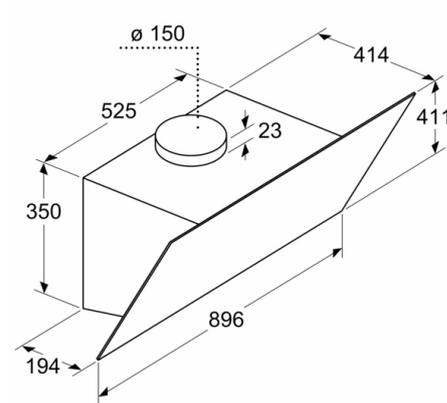


Measurements in mm

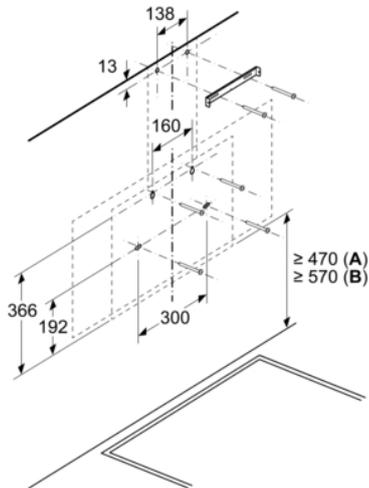

A: Electric

B: Gas - from upper edge of pan support

Measurements in mm

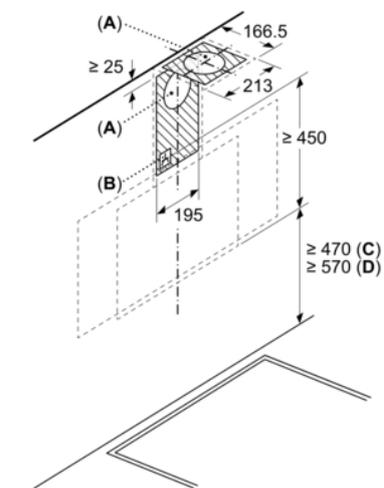

A: Exhaust-air outlet

B: Socket

C: Electric

D: Gas - from upper edge of pan support